


Jaw Crusher

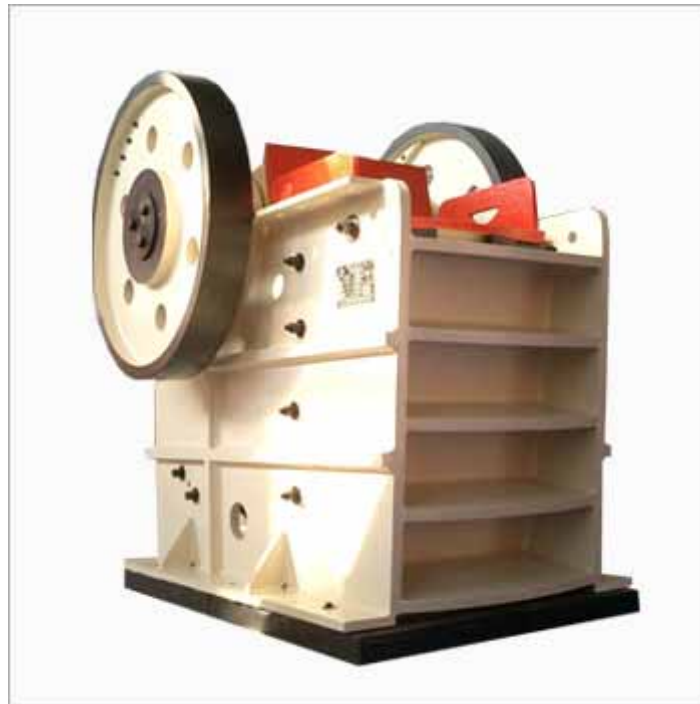

Jaw Crusher

Model	Max. feeding granularity(mm)	Adjusting range of discharge opening(mm)	Capacity (m3/h)	Power of motor(kW)	Weight (excluding electric motor) (t)
PE1600×2100	1250	175-300	870-1500	355	169
PE-1500×1800	1200	220-350	281-625	280	122
PE-1200×1500	1000	150-300	250-500	220	82.3
PE-1100×800	650	50-125	38-156	132	19.86
PE-1000×1200	850	195-265	197-214	110	50.6
PE-900×1200	750	95-165	87-164	110	50
PE-900×1060	685	230-290	100-250	110	31
PE-870×1060	660	200-260	181-210	110	30.5
PE-800×1060	640	100-200	85-143	110	30
PE-750×1060	630	80-140	72-130	110	29.3
PE-720×900	520	195-245	66-83	55-75	14.8
PE-670×900	520	195-245	66-83	55-75	14.8
PE-620×900	500	95-145	31-70	55	14.3
PE-600×900	500	65-160	30-75	55	15.5
PE-600×750	500	150-200	50-100	55	12
PE-550×900	450	50-120	47-75	55	7.8

PE-500×750	425	50-100	28.5-62.5	55	10.3
PE-475×1050	400	90-140	37.5-81	55	11.7
PE-430×600	400	90-140	35-60	37	6.5
PE-400×600	340	40-100	10-40	30	6.5
PE-250×500	210	20-80	5.7-31	18.5	3.37
PE-250×400	210	20-80	3-13.1	15	2.8
PE-150×250	125	10-40	0.6-3	5.5	0.81
PE-60×100	45	3-10	0.2-0.6	1.1	0.116
PJ-900×1200	750	100-180	94-170	110	55.4
PEV-750×1060	630	80-140	72-140	110	24.2
PEV-600×900	500	70-130	53-106	75	13
PEV-500×900	425	50-100	31.25-68.75	55	10
PEV-430×650	360	40-100	25-75	37	5.1
PEX-300×1300	250	20-90	10-65	75	11.6
PEX-250×1200	210	25-60	13-38	37	7.7
PEX-250×1000	210	25-60	10-32	30	6.5
PEX-250×750	210	25-60	8-22	22	5.1
PEX-200×1000	160	20-55	6.9-23.8	22	6.5
PEX-150×750	120	18-48	5-16	15	3.5
PEX-100×600	80	7-21	2-8	7.5	0.9

Main usage:

this series jaw crusher has properties of large crushing ratio, even granularity, simple structure, reliable operation, easy maintenance, and low cost. So this kind of jaw crusher can be widely used in mining, metallurgy, building material, highway, railway, water project, chemical industry, etc, for crushing various material with compression strength less than 320MPa.